



<JDBNS-100> Specification of Indirect Type-2L

Note:1.Applicable motor:100W,200W,400W.

2.The oiler is included.

(The position of oiler is on +LS)

3.We install the sensor outside.

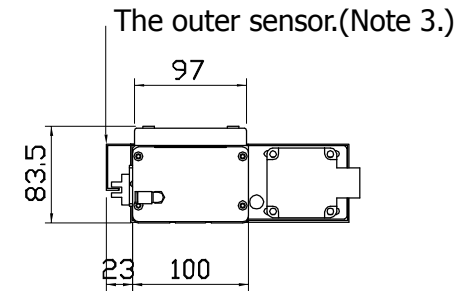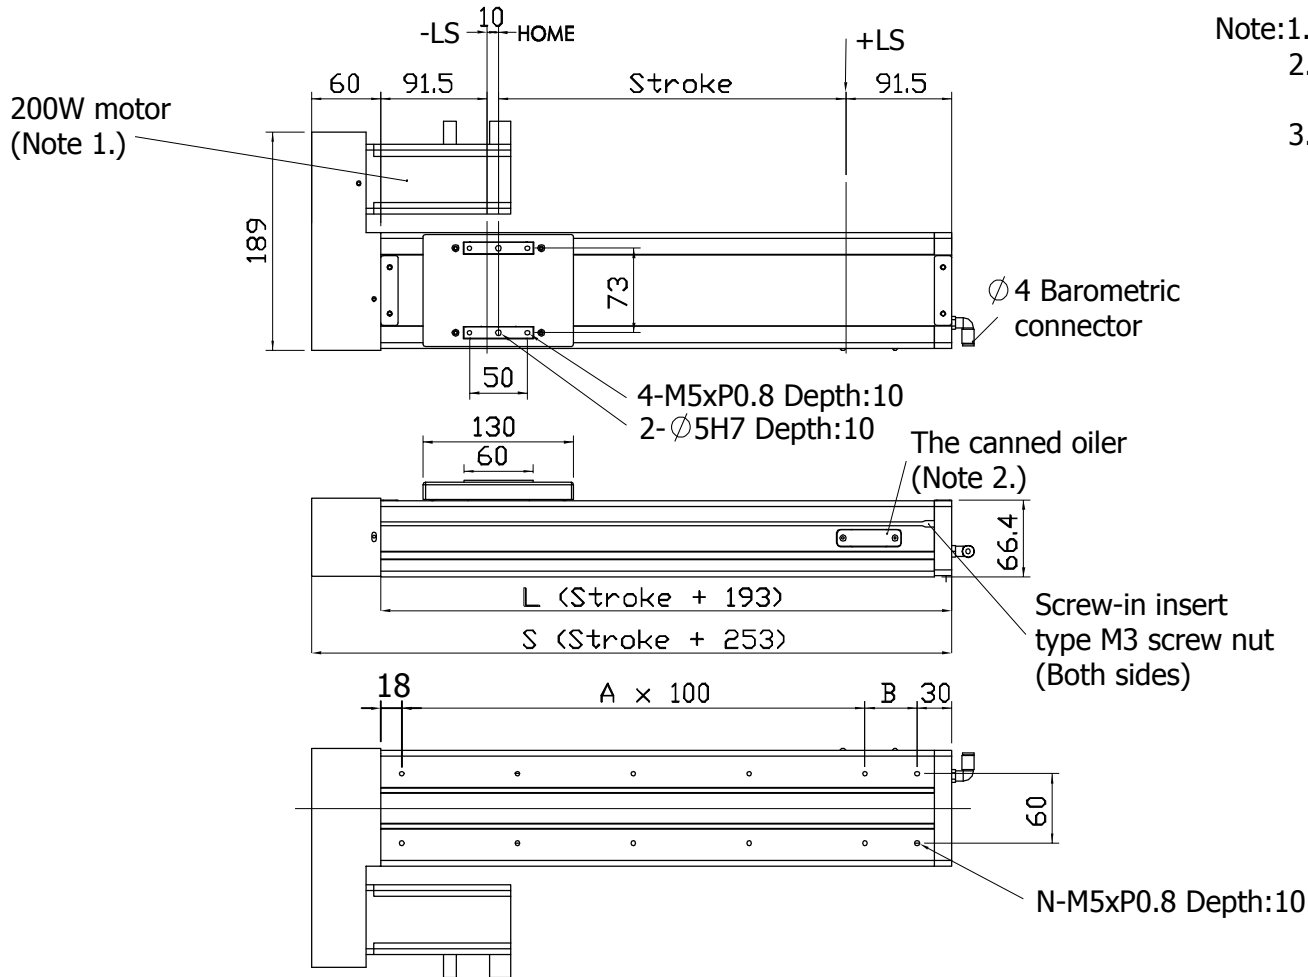

SENSOR Operation:

1.+LS

2.HOME

3.-LS

Unit:mm

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
S	303	353	403	453	503	553	603	653	703	753	803	853	903	953	1003	1053
L	243	293	343	393	443	493	543	593	643	693	743	793	843	893	943	993
A	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9
B	95	45	95	45	95	45	95	45	95	45	95	45	95	45	95	45
N	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22
Weight(kg)	5.8	6.3	6.9	7.3	7.9	8.4	8.9	9.4	9.9	10.4	10.9	11.4	11.9	12.4	12.9	13.4